

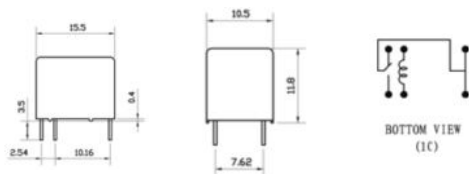
Relay Type: LSC3 - 12VDC - T

Coil Voltage : 3 ~ 24VDC

Coil Sensitivity : T :- 0.2W

D :- 0.36W

<b>Features</b>	Dimension L * W * H (mm)	15.5 * 10.5 * 11.8				
	Terminal Type	PCB				
	Weight	3.5 gm Approximately				
<b>Contact Data</b>	Contact Form	1C				
	Contact Material	Ag Alloy				
	Contact Capacity	3A @ 220VAC, 3A @ 30VDC				
<b>Coil Data</b>	Coil Voltage ( DC)	3 ~ 24 VDC				
	Coil Power Consumption	0.36W / 0.2W				
	Coil Specification	Coil Voltage	Coil Resistance ( $\Omega$ ) $\pm$ 10%		Pull in Voltage (VDC)	Drop Out Voltage (VDC)
			0.36W	0.2W		
		5 VDC	70	120	75%	10%
12 VDC		400	720	75%	10%	
24 VDC	1600	2880	75%	10%		
<b>General Data</b>	Dielectric Strength	500 VAC @ 50 Hz / Min (Between Open Contacts)				
		1000 VAC @ 50 Hz / Min ( Between Coil & Contacts)				
	Insulation Resistance	100M $\Omega$				
	Electrical Life	1 x 10 <sup>6</sup>				
	Mechanical Life	1 x 10 <sup>7</sup>				
Operating Temperature	- 25 °C ~ + 70°C					

**Mounting Diagram****Application**

Telecom, EPABX, Security System etc.